



Pixii Home

Cabinet only



Save costs through battery services like peak shaving, PV self-consumption and backup power.



The BESS that pays for itself by generating revenue from various electricity markets to maximize ROI.

Residential storage, industrial-grade quality

Pixii Home is a smart and reliable battery, designed to lower your electricity bills. Increase your energy independence, and support a greener future. Built with industrial-grade quality and engineered to meet challenging outdoor conditions.

Built for future-proof performance

Designed and manufactured in Europe. Combining robust engineering with high-quality components to deliver modular, scalable and reliable energy storage for critical applications and demanding environments.

Secure, connected, and compliant

Our 48V systems are built for always-on operation. Encrypted communications, secure remote access, and full GDPR compliance, enabling uninterrupted connectivity, real-time insight, and maximum ROI through value stacking.

Resilient by design, reliable in use

Pixii BESS feature built-in redundancy, active monitoring, and automated recovery protocols. This ensures secure operation even under failure or cyber threat, ideal for mission-critical energy storage needs.

Backup power when the grid fails

Stay powered during outages. Add an off-grid backup box to secure critical appliances and keep your home running, even when the grid goes down. Sold separately.

Smart monitoring and install tools

Save time with guided setup and simplified commissioning using the Pixii Installer App. Homeowners get real-time insights and full control through the Pixii Home App, straight from their phone.

Built to scale with your needs


This cabinet version offers full flexibility and can be configured from 10 kW/10 kWh up to 20 kW/20 kWh, allowing future upgrades as the power or energy needs increase.

Highlights

- Robust IP55 industrial cabinet
- Modular and scalable
- Operates at temp. down to -40°
- 10 years or 10 000 cycles warranty*
- European quality & GDPR compliance
- Safe ~48V installation and operation

Key functions

- Peak shaving
- PV self-consumption
- Backup power options available
- Electricity market participation

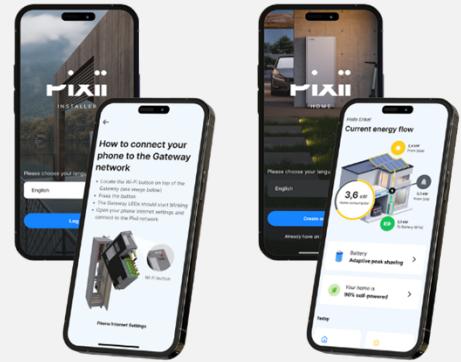

Fast setup with Installer App and full control for homeowners with the Pixii Home App

Pixii Home Cabinet only

AC specifications		Communication and connectivity		Warranty and compliance			
Grid connection type	TT / TN	Wired interfaces	Ethernet LAN, RS 485 (Modbus), Digital IO	Security and safety standards			
Phase config. (grid) ¹	3ph	Wireless interfaces	Wi-Fi hotspot (local AP)	IEC/EN 62040-1, IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477-1, RED (2014/53/EU) - Cybersecurity (effective Aug 2025)			
AC voltage (-10/+15%)	400V	Internal comm. protocols	CAN bus, Modbus TCP/RTU	Grid standards¹			
Nominal AC voltage range	207 - 260V	External comm. protocols	MQTT	EREC G99 (Type A) (UK), IEC/EN 50549-1 (Type A) (EU), TF 3.3.1 (Type A) (NO), VDE-AR-N 4105 (DE), Wymogi ogólnego stosowania (Type A) (PL)			
Nominal frequency (grid)	50Hz	Safety		EMC standards			
Max. AC power (±2%)	20kWp	Ingress Protection (IP)	IP55	IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61000-6-1, IEC/EN 61000-6-3			
Power factor (Cos φ leading)	0.5 - 1	Protection class	I	Environment standards			
Power factor (Cos φ lagging)	0.5 - 1	Overvoltage category (OVC)	II	ETSI EN 300 019-2-3 (Class 3.2), IEC/EN 63000 (RoHS)			
THDi (grid connection)	<5%	Max. short-circuit current	10kA	Warranty (years/cycles)²			
Off-grid operation support ²	Yes	Min. required SC current	0.5kA	10/10000			
Generator backup support	No	Operating conditions		<i>1. Designed in accordance with the relevant national and international standards listed above. Certification to specific revisions available on request. Additional local requirements may apply. EREC G99 (Type A) and VDE-AR-N 4105 currently valid for PixiiBox. System approval pending.</i>			
1. A 3-phase connection requires at least three PixiiBoxes, one for each phase.		Operating environment	Outdoor	<i>2. Whichever comes first. EoL defined as ≥70% SoH. See warranty document for details.</i>			
2. Single cabinet only. Requires off-grid box. Local modification for load prioritization. Single phase limited to 10kW for on-/off-grid AC connection		Thermal management	Fan, Heater				
DC specifications		Acoustic noise 1m distance	<60dB(A)				
Installed capacity (max)	0kWh	Operating amb. temp. range ¹	-40 - +45°C				
Max. system capacity	20.5kWh	Operating relative humidity ²	5 - 95% NC				
Nominal DC voltage	~48V	Max. operating altitude	2000m				
<i>1. Battery startup below 0°C may require internal heating and AC power, please refer to the "Temperature Table" in the Pixii Home guides. Derating from 45 °C 2. Non-condensing</i>							
Physical specifications							
Dimensions (HxWxD)(mm)							
1717x684x387							
Net. weight (cabinet only)							
81kg							
Color							
RAL 9006							
Status indicator (type)							
LED							
Max. batt. capacity (3U)							
4							
Installed PixiiBoxes							
0							
Max. PixiiBox capacity							
6							